

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
 Organization
 International Bureau



(43) International Publication Date
 25 March 2004 (25.03.2004)

PCT

(10) International Publication Number
WO 2004/024534 A1

(51) International Patent Classification⁷: **B62D 1/184**

[GB/GB]; NSK Steering Systems Europe Limited, Silverstone Drive, Rowleys Green, Coventry CV6 6PA (GB).
MORIYAMA, Seichi [JP/JP]; c/o NSK Limited, 8-1, Souja-machi 1-chome, Maebashi-shi, Gunma (JP).

(21) International Application Number:
PCT/GB2003/003903

(22) International Filing Date:
 9 September 2003 (09.09.2003)

(74) Agents: **FEAKINS, Graham, Allan et al.**; Raworth, Moss & Cook, Raworth House, 36 Sydenham Road, Croydon, Surrey CR0 2EF (GB).

(25) Filing Language: English

(26) Publication Language: English

(81) Designated States (*national*): JP, US.

(30) Priority Data:
 0220950.0 10 September 2002 (10.09.2002) GB

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).


(71) Applicant (*for all designated States except US*): **NSK STEERING SYSTEMS EUROPE LIMITED** [GB/GB]; Belmont Place, Belmont Road, Maidenhead, Berkshire SL6 6TB (GB).

Published:
 — with international search report

(72) Inventors; and
 (75) Inventors/Applicants (*for US only*): **ALI, Mohammed**

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **CLAMPING APPARATUS FOR ADJUSTABLE STEERING COLUMN FOR A VEHICLE**

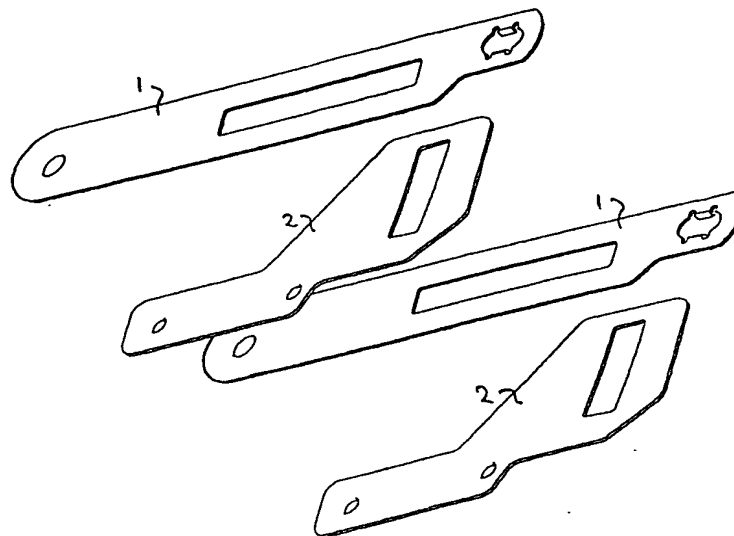

(57) Abstract: A clamping apparatus for an adjustable steering column for a vehicle includes at least two, relatively slidable plates (1, 2) that can be clamped relatively to one another. More than two plates can be provided to form a pack of plates. Alternate plates have relatively slidable, clamping surfaces that can contact one another, the respective clamping surfaces of the two plates being made of material of different hardnesses. In use, the softer material of one of the plates will deform due to the rubbing of the material of the harder plate and this increases stiction and friction, thereby converting friction into a sheer stress load.

WO 2004/024534 A1